

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 411 273 A1**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: 90110558.5

(51) Int. Cl.<sup>5</sup>: **A61B 17/56**

(22) Date of filing: 05.06.90

(30) Priority: 03.08.89 US 388848

CH-7002 Chur(CH)

(43) Date of publication of application:  
06.02.91 Bulletin 91/06

(72) Inventor: Frigg, Robert  
Promenade 5  
CH-7270 Davos-Dorf(CH)

(54) Designated Contracting States:  
CH DE FR GB LI

(74) Representative: Lusuardi, Werther Giovanni  
Dr. Lusuardi AG Kreuzbühlstrasse 8  
CH-8008 Zürich(CH)

(71) Applicant: SYNTHES AG  
Grabenstrasse 15

(54) Osteosynthetic assembly with twist fixation plate.

(57) This assembly for use in osteosynthesis comprises an intramedullary nail (17) for insertion into the medulla of a femur (18) and a fixation plate (10) with a helically twisted blade (12) for insertion into the head of the femur (18).

The intramedullary nail (17) has a longitudinal through slot (19) running from lateral to medial adapted to movably receive said fixation plate (10) and one through hole (26) to accommodate a screw (27) for retaining firmly the fixation plate (10) to the

intramedullary nail (17).

The fixation plate (10) comprises a retaining plate (11) having a hole (14) for receiving the screw (27) for retaining firmly the fixation plate (10) to the lateral shank of the femur (18) and to the intramedullary nail (17), and a helically twisted blade (12) extending medially from the retaining plate (11).

The assembly according to the invention is useful for osteosynthetic treatment of intertrochanteric fractures and fractures of the neck of the femur.

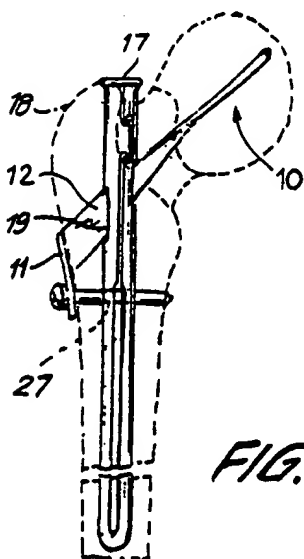


FIG. 1

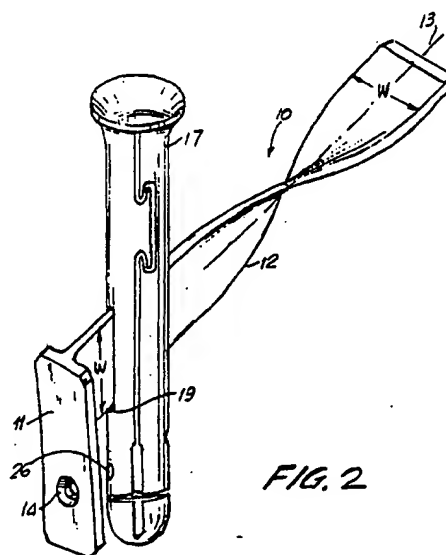


FIG. 2

EP 0 411 273 A1

## OSTEOSYNTHETIC ASSEMBLY WITH TWIST FIXATION PLATE

### Field of the invention

This invention relates to an assembly for use in osteosynthesis according to the preamble of claim 1.

### Background of the invention

The assembly according to the invention is used for the treatment of fractures of the femur which extend into the neck of the bone and which are generally more difficult to treat than fractures restricted to the shaft of the femur.

Various osteosynthetic assemblies have been used in the treatment of these difficult fractures.

In one class of devices an intramedullary nail having transverse holes at or near its head is inserted into the femur and then one or more screws are inserted angularly across the head of the intramedullary nail. Such a nail is shown, for example in EP-A 257,118. A similar device is disclosed in US-Patent No. 4,628,920 MATHYS showing an intramedullary nail with a longitudinal through-slot for receiving transverse wires or pins with the purpose of fixing the head of the intramedullary nail, i.e. in order to give rotational stability to the intramedullary nail inserted in the femur.

All such prior art devices of this class have one deficiency or another. Some require extremely large or heavy screws; or where small transverse screws are employed the device does not provide adequate support.

Another known design is disclosed in US-Patent No. 3,025,853 MASON teaching the use of a twisted blade attached to a retaining plate for further attachment to the bone without implantation of an intramedullary nail. The retaining plate of this device is therefore not supported by or fixed to another osteosynthetic device, such as an intramedullary nail, and depends wholly on its attachment to the bone. This produces an unfavourably long lever arm (formed by the helically twisted blade) acting on the bone.

Another known design is disclosed in US-Patent No. 4,103,883 NEUFELD which teaches the combined use of a femoral nail with a slot for receiving a fixation device, which includes a helically twisted blade. The fixation device is firmly seated in the slot by use of a set screw at a right angle with respect to the nail axis allowing no relative movement between the blade and the nail no anatomically adequate positioning of the fixation de-

vice. Furthermore this design produces an unfavourably long lever arm (formed by the helically twisted blade) acting on the femoral nail.

### Summary of the invention

The invention as claimed is intended to remedy these drawbacks. It solves the problem of how to design an osteosynthetic assembly for reduction and stabilization of this type of difficult femur fractures which extend into the neck of the femur which is strong, light and relatively simple to implant.

In a principle aspect it comprises an osteosynthetic assembly for fixation of fractures of the femur which extend into the neck of the femur comprising the features of claim 1.

The fixation plate used in the assembly according to the invention includes an outer retaining plate which can be attached, as by screws, to the lateral shank of the femur and a blade extending from the retaining plate and designed to extend into the neck of the femur. The blade is twisted helically about 90°, preferably in a continuous way and is adapted to movably pass through a longitudinal slot in an intramedullary nail which has been driven into the shank of the femur. The longitudinal axis of the blade forms preferably an angle  $\alpha$  in the range of 90° - 150° with the plane of the retaining plate and preferably carries a cannula for receiving a guide wire, such as a Kirschner wire.

The retaining plate has one or more screw holes to accommodate screws for fastening the retaining plate to the intramedullary nail. The portion of the blade nearest to the retaining plate is preferably orthogonal to said retaining plate.

When said blade is positioned in the slot of the intramedullary nail the portion of the blade in the slot has its major dimension, W, preferably parallel to the longitudinal axis of the intramedullary nail, and the portion of the blade most remote from the retaining plate has its major dimension, W, preferably transverse to the longitudinal axis of the intramedullary nail.

The fixation device is movably supported by the bottom wall of the slot of the intramedullary nail allowing the angular and/or longitudinal positioning of the helically twisted blade by the action of retaining screws inserted through the hole of the retaining plate for retaining firmly the fixation device to the intramedullary nail.

The main advantages offered by the invention are the following:

a) The assembly according to the invention

comprises a blade which is not only firmly attached to the bone but which is additionally secured to the intramedullary nail. The resulting structure is both strong and light. By means of this construction the blade of the assembly according to the invention is able to transmit heavy loads both to the bone and to the intramedullary nail. Nevertheless, due to this stable structure, the blade can be designed in a very flat shape necessitating the removal of only a small volume of bone material upon insertion.

b) In the invention the fixation device is actually fixed to the femur and is only movably supported by the bottom wall of the slot of the femoral nail allowing a precise angular and longitudinal positioning of the helically twisted blade by means of the retaining screws inserted through the screw holes of the retaining plate.

c) The force distribution upon the several structural elements (blade/slot of nail/retaining plate/femoral shaft/retaining screw/femoral nail) in this complex osteosynthetic assembly is far superior to the prior art devices.

The assembly according to the invention is useful for osteosynthetic treatment of intertrochanteric fractures and fractures of the neck of the femur. It may also be used to treat brittle bone, such as those caused by osteoporosis. Since smaller, lighter intramedullary nails may be used with this assembly, there is less damage to the rest of the bone. It is easier to remove than similar prior art assemblies. Furthermore, when this assembly is used, it is often unnecessary to ream out as much bone as is the case with the prior art devices. The same assembly may be used for treatment of fractures of either the left or right femur.

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming part of this disclosure. For the better understanding of the invention, its operating advantages and specific objects attained by its use, reference should be had to the accompanying drawings and descriptive matter in which are illustrated and described preferred embodiments of the invention.

### Description of the drawings

Fig. 1 is a schematic view showing an osteosynthetic assembly according to the invention, including a fixation plate and an intramedullary nail implanted in a femur;

Fig. 2 is a more detailed, partially fragmentary, schematic view showing the fixation plate of Fig. 1 inserted in an intramedullary nail;

Fig. 3 is a view in side elevation of the fixation plate of Fig. 1;

Fig. 4 is a view in side elevation of a modified fixation plate used in the invention;

Fig. 4A is a cross sectional view, showing the section A-A of Fig. 4;

Fig. 5 is a schematic view showing insertion of an intramedullary nail into a femur in an osteosynthetic procedure using the assembly according to the invention;

Fig. 6 is a schematic view showing insertion of a guide wire such as a Kirschner wire through the intramedullary nail of Fig. 5;

Fig. 7 is a schematic view showing use of a chisel in an osteosynthetic procedure to cut a hole in the lateral side of the femur at the correct angle for implantation of an assembly according to the invention; and

Fig. 8 is a schematic view showing insertion of the fixation plate of an assembly according to the invention into the fractured femur.

### Detailed description

The osteosynthetic assembly according to the invention is shown in Figs. 1 and 2. As shown in Figure 1, an intramedullary nail 17 is positioned in the medulla of a femur 18. The intramedullary nail 17 may be of any suitable design and material, although it is preferred to use an intramedullary nail 17 of the type shown and described in the US-Patent No. 4,628,920. The intramedullary nail 17 is provided with a slot 19 to accommodate the blade 12 of a fixation plate 10 and one or more through holes 26 to accommodate one or more retaining screws 27 inserted through screw hole 14 in the retaining plate 11. Additional screw holes (not shown) may be provided to permit transverse retaining screws or bolts (not shown) to be inserted at the distal end of the intramedullary nail 17.

Referring now to Fig. 3, the fixation plate 10 as used in the assembly according to the invention comprises a retaining plate 11 which is adapted to lie along the lateral shaft of the femur 18 and a blade 12 which extends transversely to the plane of retaining plate 11. The axis 13 of the blade 12 forms an angle  $\alpha$  with the plane of retaining plate 11 which may vary according to the individual patient, but which will in general be between about  $90^\circ$  and about  $150^\circ$ .

As shown in Fig. 3, the blade 12 is helically twisted around its axis 13, the total angular displacement being about  $90^\circ$ .

The retaining plate 11 may be furnished with one or more screw holes 14 for fixing the retaining plate 11 to the lateral shaft of the femur 18.

A modified version of the fixation plate 10 is shown in Figs. 4 and 4A. Referring to these figures, the blade 15 of the fixation plate 10 may be provided with a cannula 16 for receiving a Kirschner guide

wire or the like to facilitate insertion of the blade 15 into the bone, in the manner described below.

The method of using an osteosynthetic assembly according to the invention is illustrated in Figs. 5 to 8.

In Fig. 5, an intramedullary nail 17 having the structure shown in Figs. 1 and 2 has been inserted into the lateral shaft of a femur 18, in conventional manner. Attached to the intramedullary nail 17 is an insertion handle 21, a standard fixture used to insert intramedullary nails. Following emplacement of the intramedullary nail 17, as shown in Fig. 6, a Kirschner guide wire 22 may be inserted through the area of the fracture in the neck of the femur 18, passing through slot 19 in the intramedullary nail 17. The Kirschner guide wire 22 may be installed in a conventional manner using an alignment device 23, attached to the insertion handle 21 to ensure that it is placed at the proper angle. The Kirschner guide wire 22 extends from the exterior of the femur 18 through the bone across the fracture or fractures.

As shown in Figure 7 the Kirschner guide wire 22 may then be used to guide the insertion of a chisel 24 into the bone 18 at the correct angle to cut a hole in the lateral side of the femur 18. The chisel 24 may be cannulated, as at 25, to ensure alignment with the Kirschner guide wire 22.

Figure 8 shows the fixation plate 10 used in the assembly according to the invention about to be inserted into the fractured femur 18. If the blade 15 is cannulated, as shown in Figs. 4 and 4A, the cannula 16 of the fixation plate 10 is slid over the Kirschner guide wire 22 to ensure insertion of the fixation plate 10 at the correct angle. It is not necessary, however, to have such a cannula 16 on the blade 15 of the fixation plate 10.

Referring back to Fig. 1, the fixation plate 10 has been inserted and the outer retaining plate 11 lies against the exterior of the lateral shaft of the femur 18. A screw 27 is inserted through the screw hole 14 in the retaining plate 11, into the bone and through screw hole 26 in the intramedullary nail 17. Referring to Fig. 2, when the blade 12 is inserted in the intramedullary nail 17 through its slot 19 its major dimension, W, transverse to its axis 13, of the portion of the blade 12 in and near the slot 19 is parallel to the axis of the femur 18 into which the intramedullary nail 17 is inserted. Thus the major bending stress, which will occur at the end of the blade 12 nearest the retaining plate 11, will be borne by the major dimension of the blade 12. On the other hand, at the outer end of the blade 12, its major dimension, W, will be transverse to the axis of the intramedullary nail 17 and to the axis of the femur 18 in which it is inserted. Thus the blade 12 will give maximum support where it is actually needed.

The blade 12 of the fixation plate 10 has a large surface area, yet the fixation plate 10 of the assembly according to the invention is less bulky than prior art devices. Consequently it is able to support even soft bone structure.

## Claims

1. An assembly for use in osteosynthesis, said assembly comprising an intramedullary nail (17) for insertion into the medulla of a femur (18) and a fixation plate (10) with a helically twisted blade (12) for insertion into the head of the femur (18), characterized in that said intramedullary nail (17) has a longitudinal through slot (19) running from lateral to medial adapted to movably receive said fixation plate (10) and at least one through hole (26) to accommodate means (27) for retaining firmly said fixation plate (10) to said intramedullary nail (17), and that said fixation plate (10) comprises a retaining plate (11) having at least one hole (14) for receiving said means (27) for retaining firmly said fixation plate (10) to the lateral shank of the femur (18) and to said intramedullary nail (17), and a helically twisted blade (12) extending medially from said retaining plate (11).
2. An assembly for use in osteosynthesis, said assembly comprising an intramedullary nail (17) for insertion into the medulla of a femur (18) and a fixation device (10), said fixation device (10) having a retaining plate (11) for positioning along the outside surface of the lateral shank of the femur (18) and a helically twisted blade (12) extending from said retaining plate (11) for insertion into the head of the femur (18), and said intramedullary nail (17) having a longitudinal through slot (19) to movably receive the blade (12) of said fixation device (10) having cooperating apertures (26) for receiving retaining means (27) extending through the aperture (14) of said retaining plate (11), through the bone (18) and into the aperture (26) of said intramedullary nail (17).
3. An assembly according to claim 1 or 2, characterized in that the blade (12) is helically twisted around its axis (13), preferably in a continuous way, the total angular displacement being about 90°.
4. An assembly according to one of the claims 1 to 3, characterized in that the blade (12) has a longitudinal axis (13) which forms an angle  $\alpha$  in the range of 90° - 150° with the plane of said retaining plate (11).
5. An assembly according to one of the claims 1 to 4, characterized in that the blade (15) has a cannula (16) for receiving a guide wire (22).
6. An assembly according to one of the claims 1 to 5, characterized in that the portion of the blade

(12;15) nearest to the retaining plate (11) is orthogonal to said retaining plate (11).

7. An assembly according to one of the claims 1 to 6, characterized in that when said blade (12;15) is positioned in the slot (19) of said intramedullary nail (17) the portion of the blade (12,15) in the slot (19) has its major dimension generally parallel to the longitudinal axis of said intramedullary nail (17), and the portion of the blade (12,15) most remote from said retaining plate (11) has its major dimension generally transverse to the longitudinal axis of said intramedullary nail (17).

8. An assembly according to one of the claims 1 to 7, characterized in that said fixation device (10) is movably supported by the bottom wall of said slot (19) of said intramedullary nail (17) allowing the angular and/or longitudinal positioning of said helically twisted blade (12;15) by the action of said means (27) for retaining firmly said fixation device (10) to said intramedullary nail (17), preferably in form of retaining screws (27) inserted through the said hole (14) of said retaining plate (11).

5

10

15

20

25

30

35


40

45


50

55




5

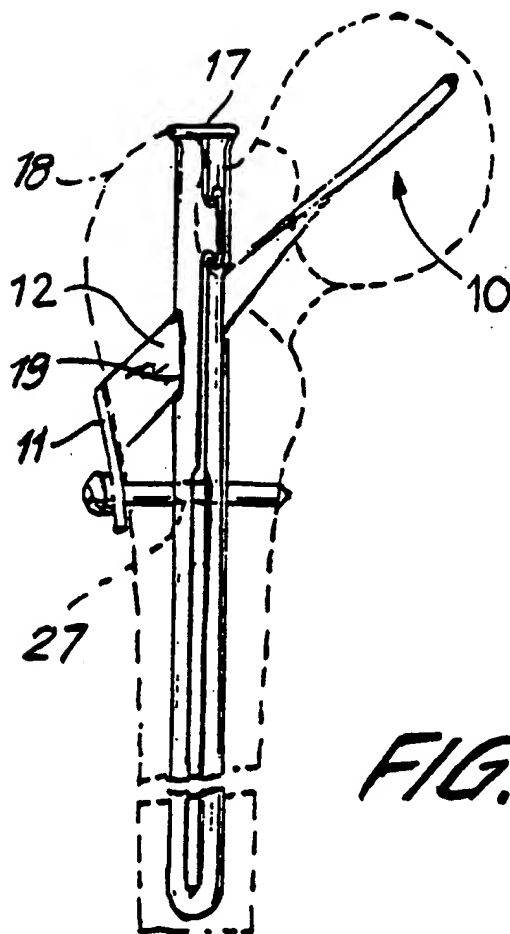

**FIG. 1**

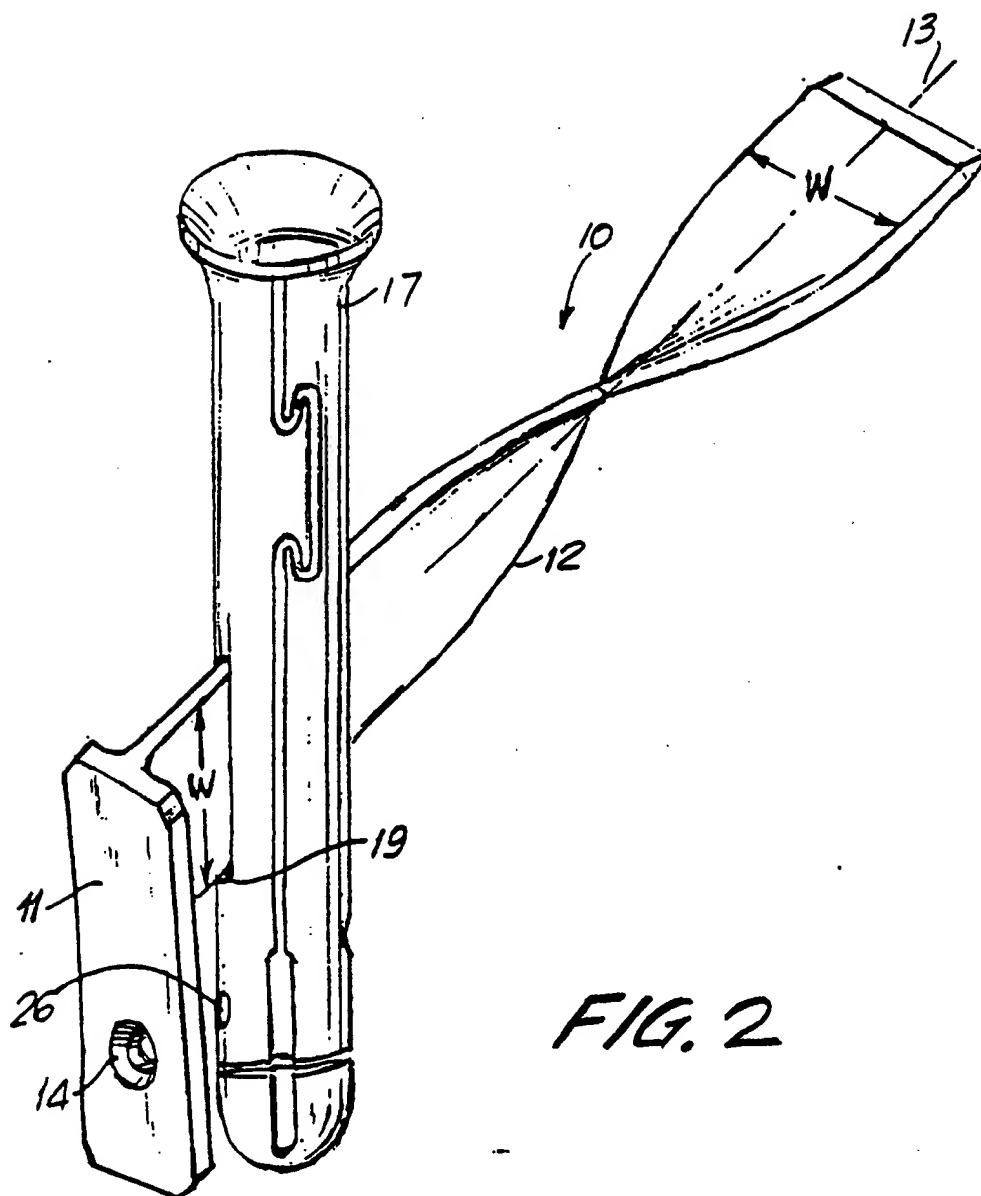



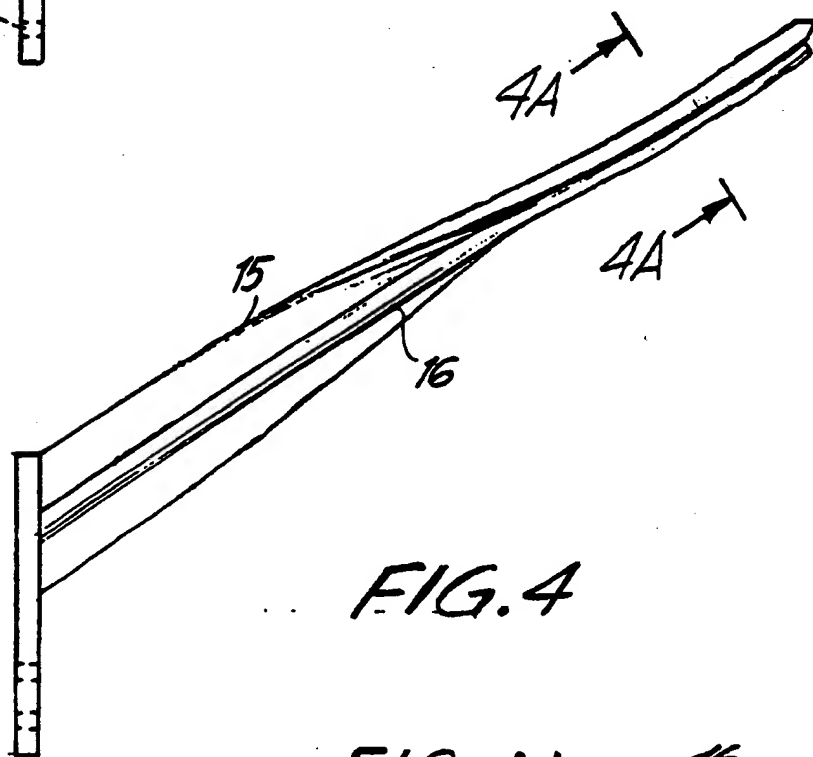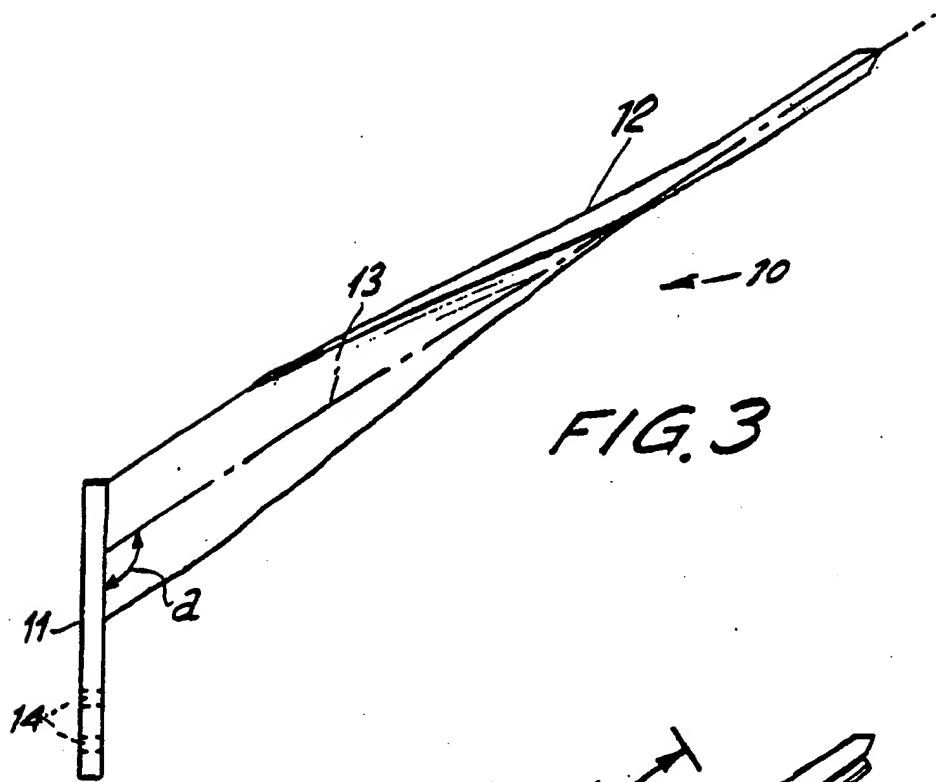

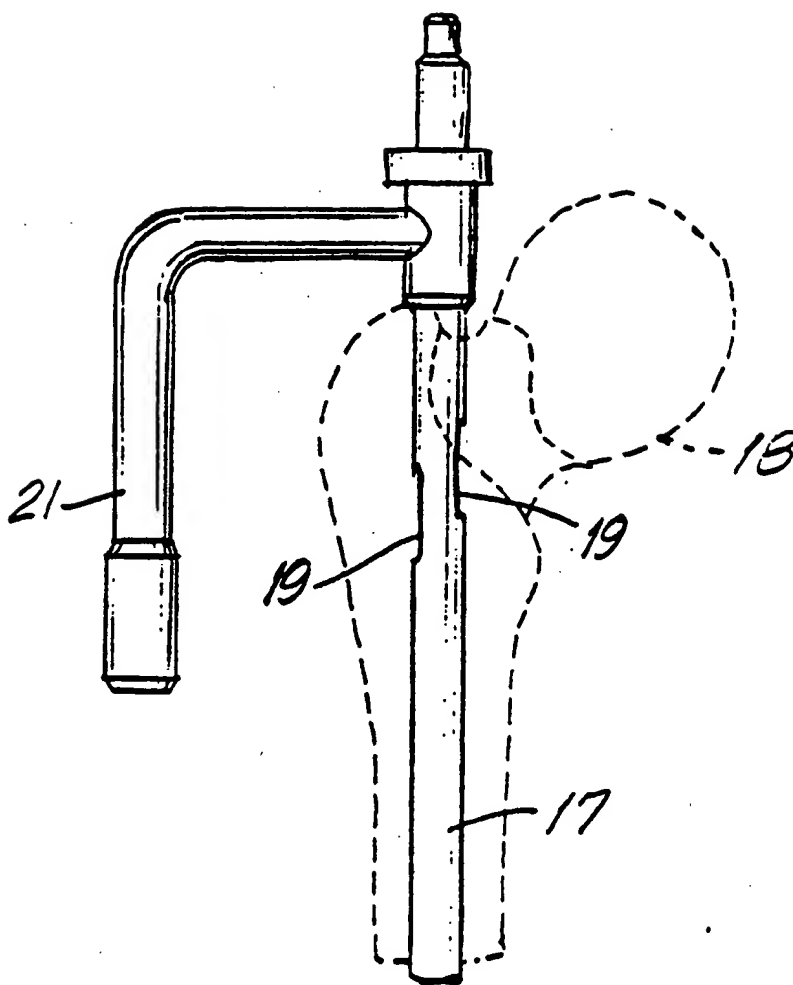


FIG. 5

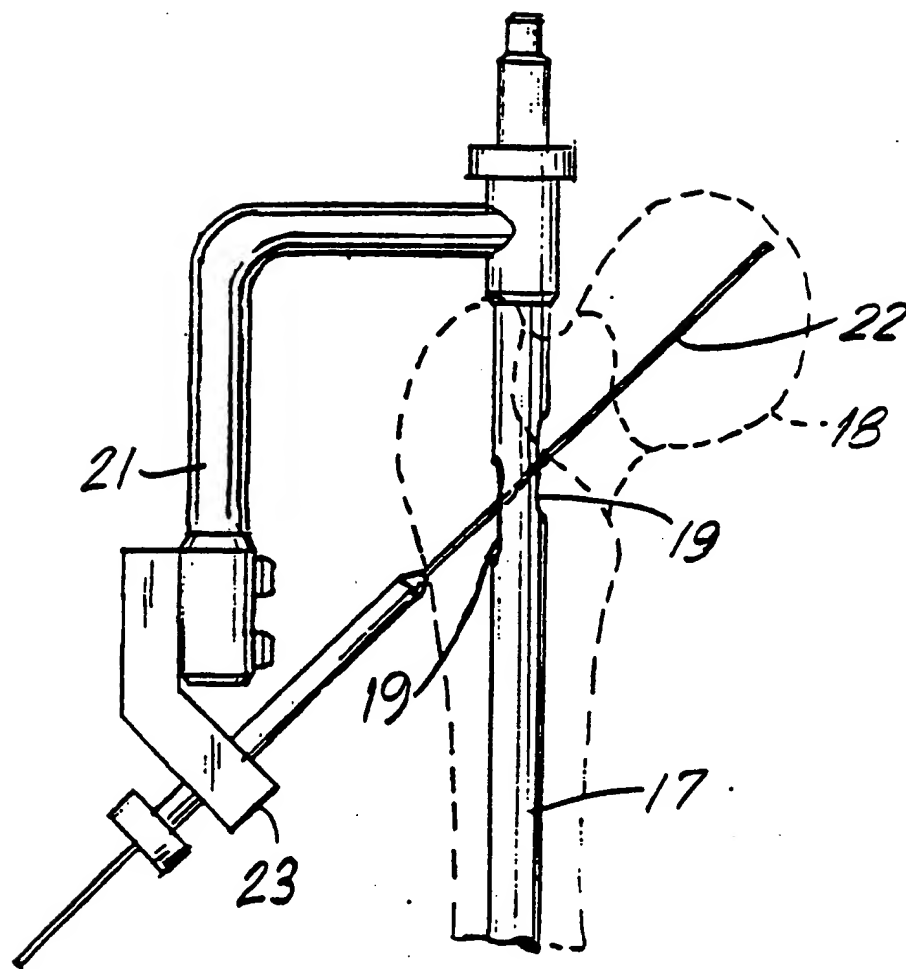
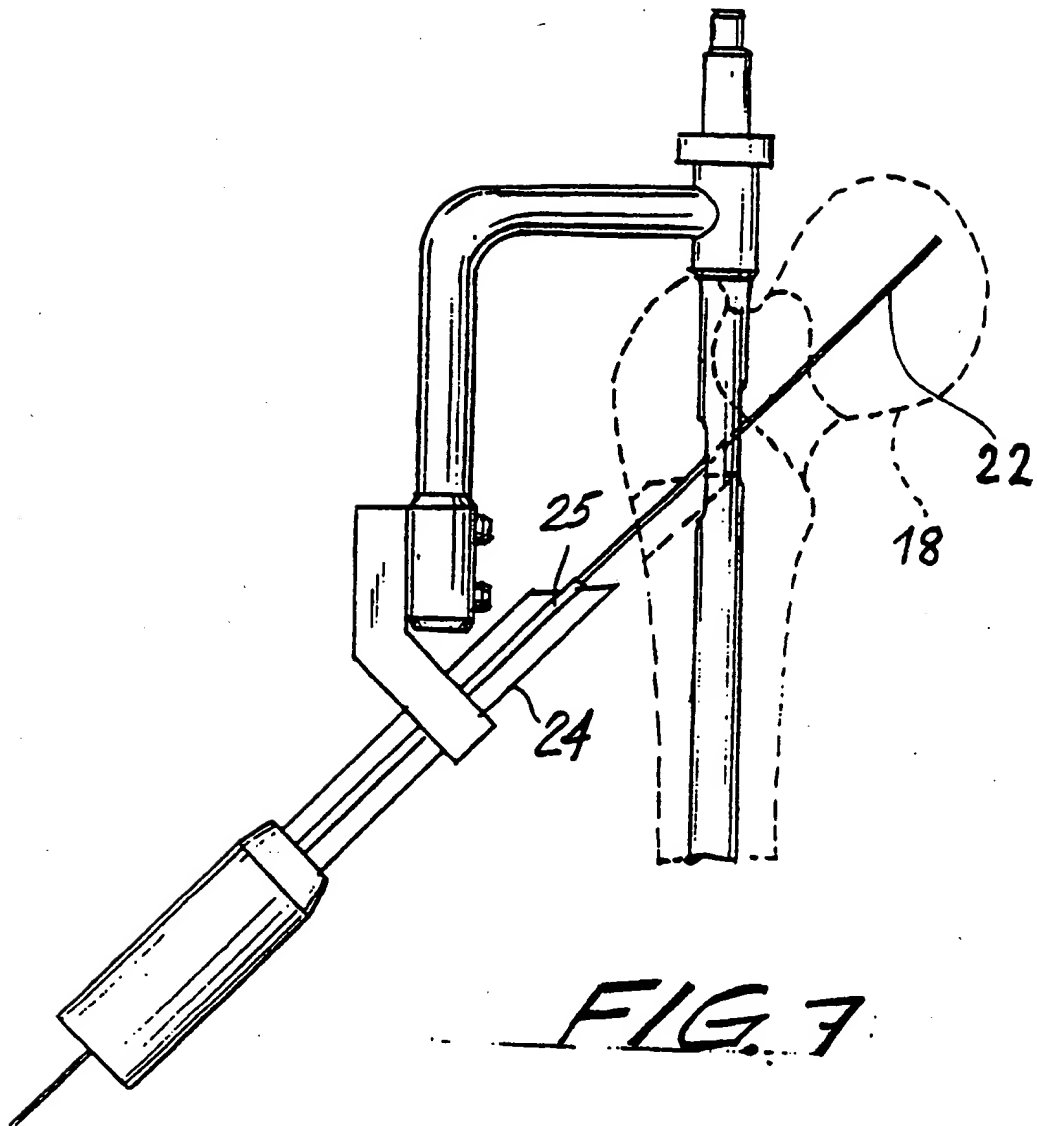


FIG. 6



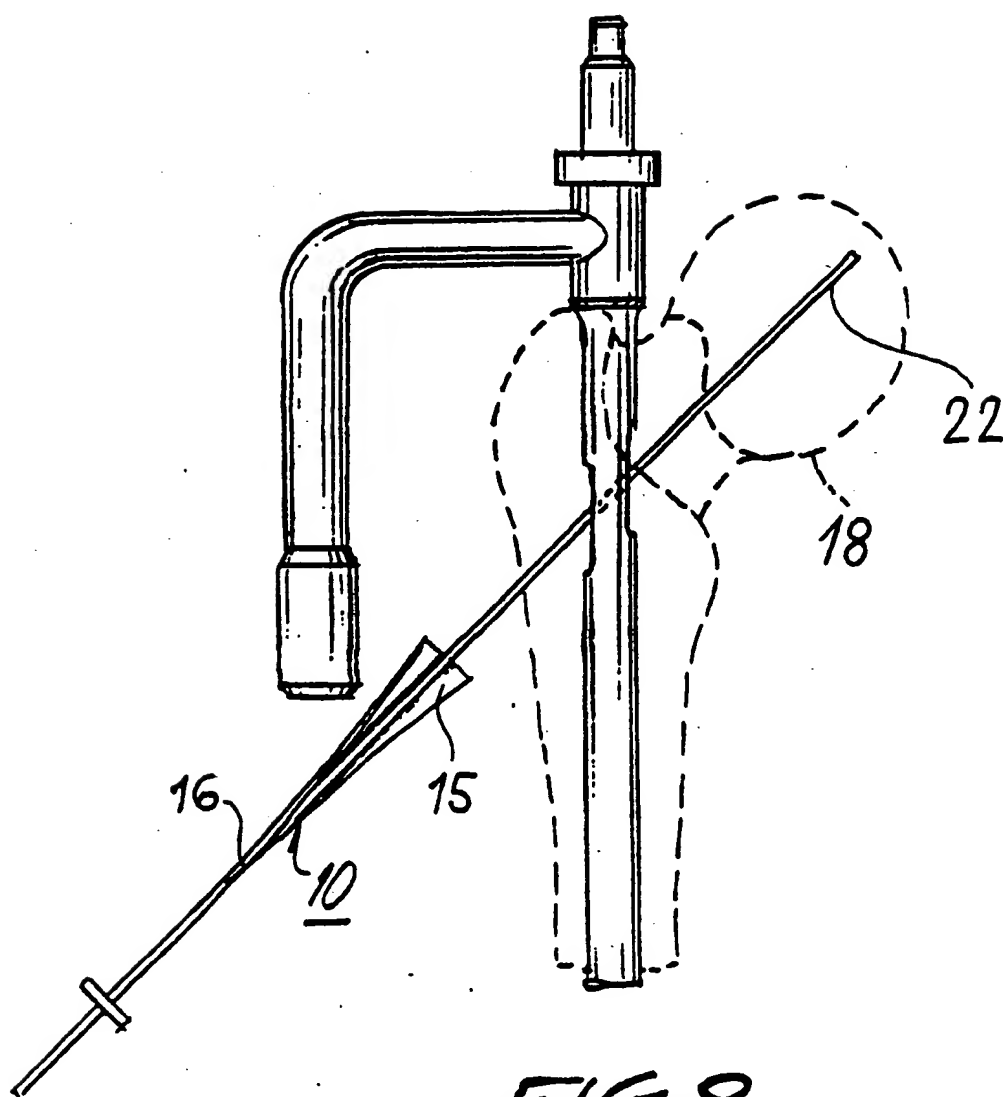


FIG. 8



European  
Patent Office

## EUROPEAN SEARCH REPORT

Application Number

EP 90 11 0558

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
Y	US-A-4 733 654 (MARINO) * Column 1, lines 32-61; figure 1 *	1-8	A 61 B 17/56
	-----		
Y,D	US-A-4 103 683 (NEUFELD) * Column 3, lines 35-55; column 6, lines 3-7; figure 1 *	1-8	
	-----		
A	EP-A-0 192 840 (WILLIAMS) * Page 5, lines 17-28; figure 1 *	1,2,4,8	
	-----		
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			A 61 B
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		07 November 90	MOERS R.J.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X: particularly relevant if taken alone		E: earlier patent document, but published on, or after the filing date	
Y: particularly relevant if combined with another document of the same category		D: document cited in the application	
A: technological background		L: document cited for other reasons	
O: non-written disclosure		-----	
P: intermediate document		&: member of the same patent family, corresponding document	
T: theory or principle underlying the invention			